


SILICONE MOULD BELT

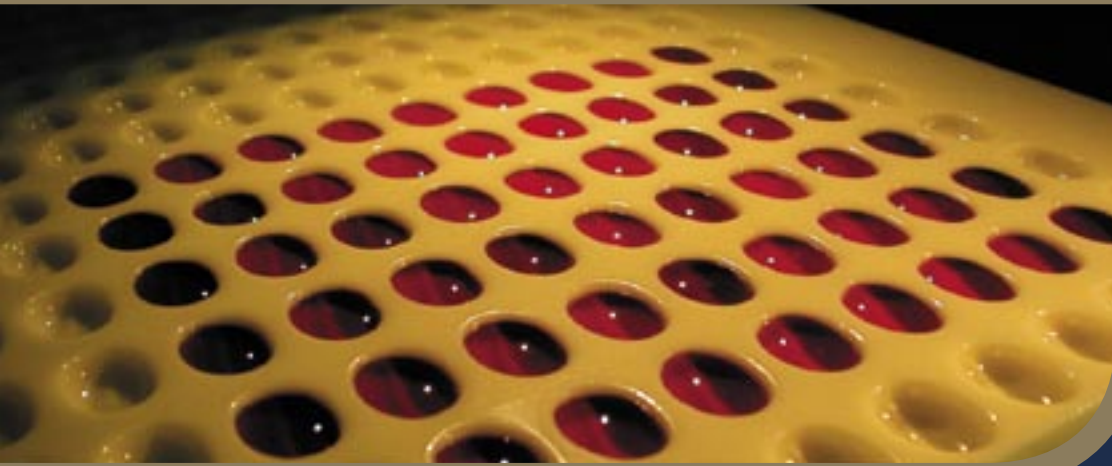

- molding, cooling and transport in 1 step
- shaping according to customer requirement

Construction:

- 2-ply strand polyester fabric belt with silicone rubber coating with variable thickness and surface structure

Characteristics:

- hydrolysis resistance (water proofed)
- temperature resistance
- high release belt surface
- even belt thickness in the joint area
- lateral stability
- belt width up to 1.300 mm
- food suitability according to FDA/USDA
- high carrying and tensile strength

Application areas:

- sweets industry
- chocolate products
- hard candy
- bar production
- jelly products
- candle production
- pharmaceutical industry
- sorting facility
- frozen food
- animal food

Material:

- polyester fabric strand
- FDA/USDA certificated silicone rubber

Joining methods:

- belt supply in endless length according to customer requirement
- welding
- fastener